

analog and digital sensors) and controlled devices are called actuators (switch digital or analog signals-electrical switches, electrical dimmers, motor control, electrical display, thermostats controls) [13-16].

The software used to perform the computer simulations for the current investigation is as follows

– *AutoCAD* - CAD (computer-aided design) software that architects, engineers, and construction professionals rely on to create precise 2D and 3D drawings. It was used for designing and drawing the electrical installation of the building [18].

– *DIALux evo* - a software for professional lighting design and it was used for computer modeling of the interior, the lighting and 3D visualization of the home [19].

– *Cisco Packet Tracer* was used for network design by connecting different devices to allow for various troubleshooting tests, connectivity and communication testing [20].

The electrical installation interior in the house is designed in AutoCAD which includes electrical wirings details with earthing wire details. Basement, first floor, second floor, attic level, and house plan details are also included in the drawing. It also shows the dimension and circuit flow diagram (Fig. 2) [21]. 2D design of the home automation of the LAN and TV cable in AutoCAD is presented in Fig. 3.

The home automation system consists of three main components: 1) software application through which the user can control the system by computer, smartphone or tablet; 2) transmitter device that connects the software to other devices and 3) peripherals used to execute specified commands. The sensors used in the automation of the building are the most intelligent way to catch all the action happening in the home in real-time. The devices monitor movements, track ambient lighting, keep a tab on indoor temperature and humidity, listen for seismic activity, and protect the home from UV lighting.

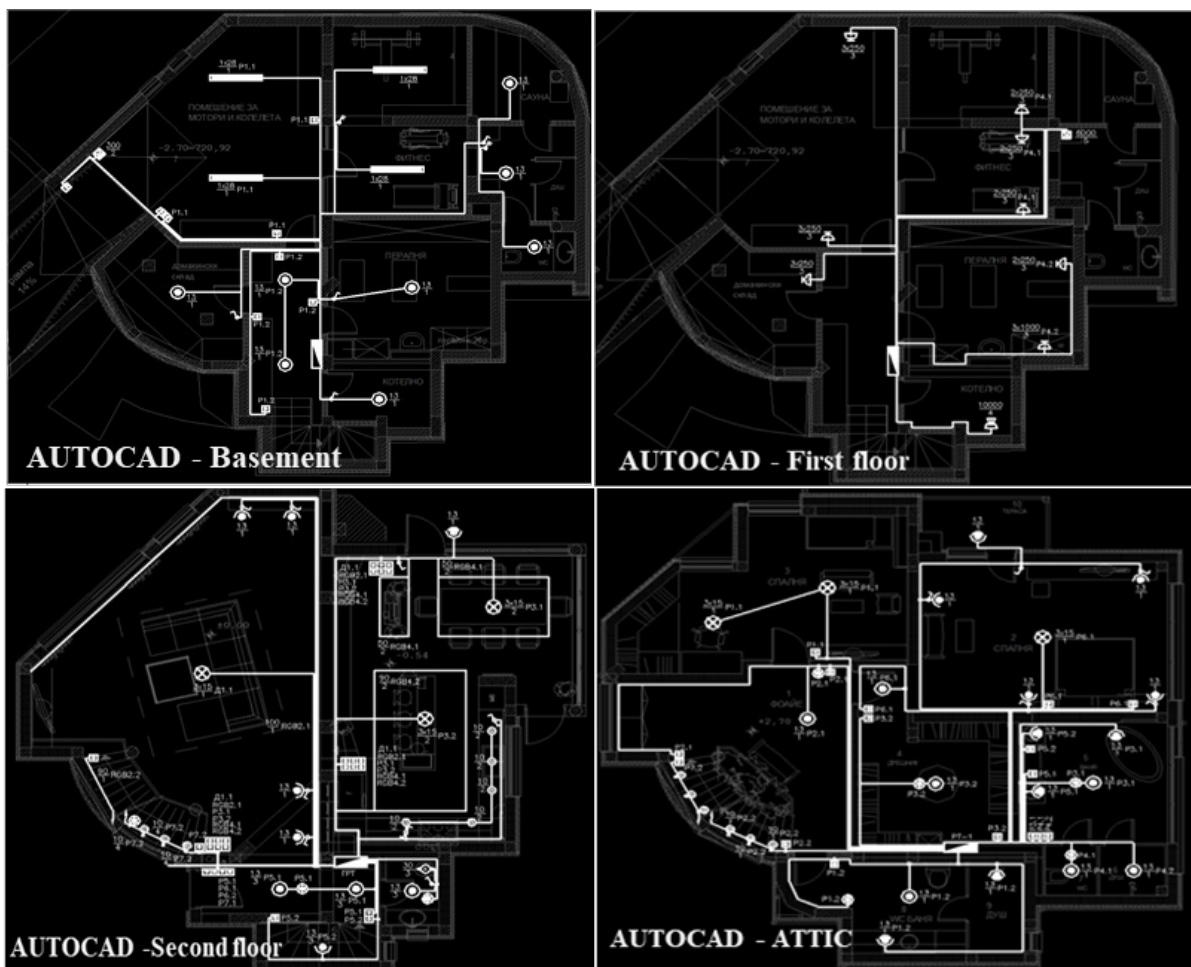


Fig. 2. Design and installation of the current systems of the building realized by AutoCAD.

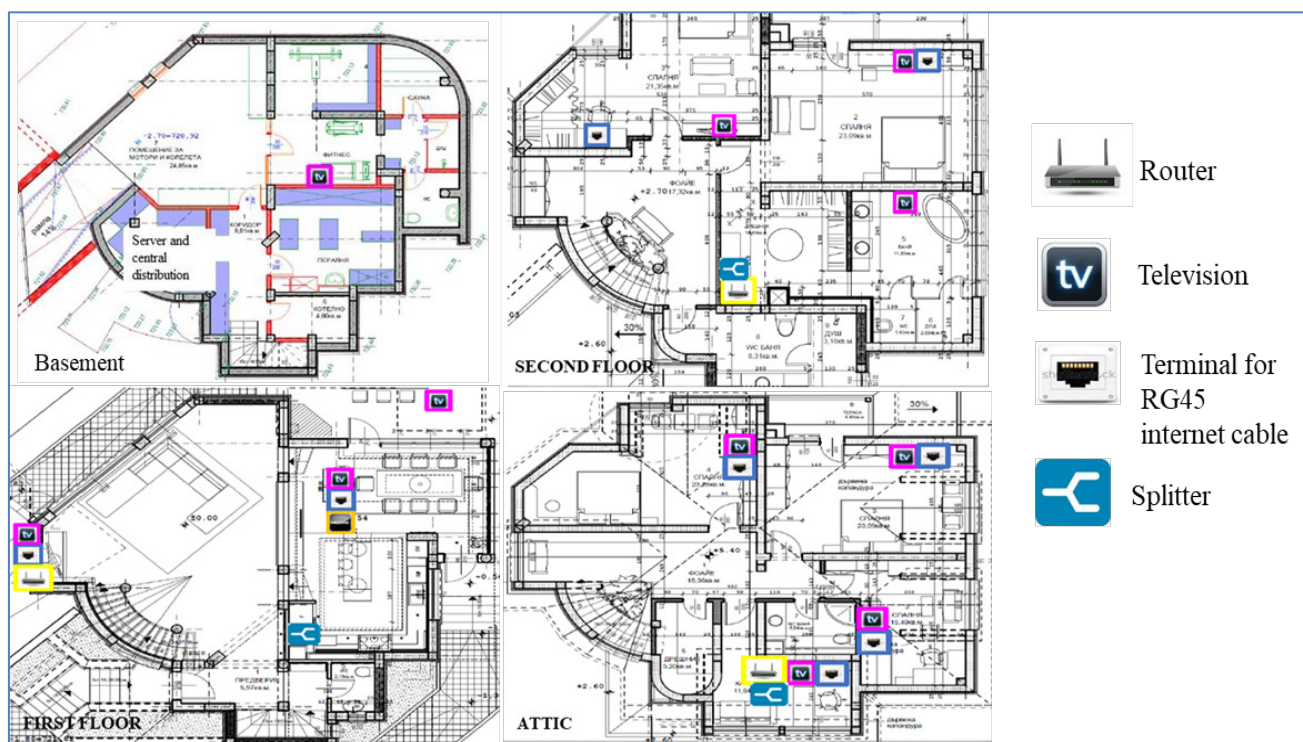


Fig. 3. Design and installation of low-current systems of the building realized by AutoCAD.

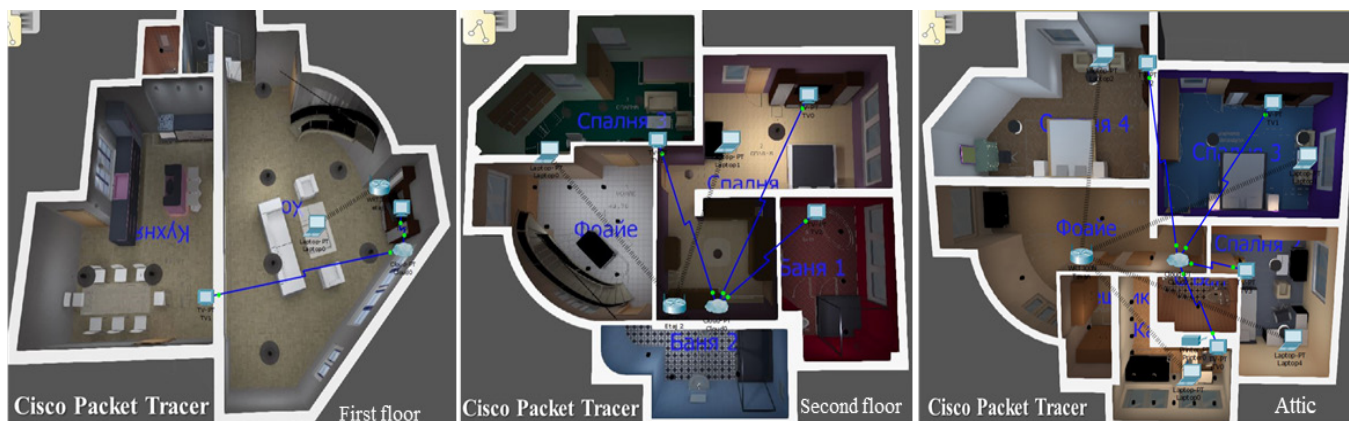


Fig. 4. 3D Design of the building realized on DIALux Evo and Cisco Packet Tracer.

They can be configured to work with the Z-wave controller to receive real-time updates and notifications of building activity. The installed sensors make it possible to monitor home activities in real-time.

3D visualization and lighting design of the building realized on the DIALux Evo program are presented in Fig. 4.

Smart sensors are designed to provide an integrated solution for staying connected with the home, even while we are at work or on a vacation.

The new generations of sensor devices used in home automation have some significant improvements, with sensors now transmitting signals faster and farther.

Motion sensors can be successfully applied in building an intelligent security system. The new sensors feature a range of 5 meters and a field of view of 120°. They capture traffic data and intelligently track every activity in the home. These sensors are used to increase security in the home and to monitor movements, even when we are away from home. They make our home automation system more powerful and smarter.

Z-wave is successfully used to maintain the room temperature, including control of motorized curtains and windows, fans and thermostats. The sensors connected to the Z-wave smart gateway can intelligently control the heating in the home.

Z-wave smart home products can communicate with each other, regardless of brand or building platform, using a central smart hub.

Z-wave is the leading wireless technology behind many of the secure, reliable brands that work to make everyone's home smarter and safer. Z-wave smart home products can communicate with each other, regardless of brand or building platform, using a central smart hub.

A smart hub is used in the automation of the building. The central smart hub ensures that devices in the home are connected to each other and to the user by a simple mobile application for smartphones (tablets). It acts as a central command center for each connected Z-wave device and for connection to the user. Z-wave smart home hubs have a variety of features and capabilities, including Wi-Fi technology that allows remote access to the system [21-28].

There is a smart lighting in the house, which allows remote control of light, on or off, dimming, changing the brightness and color of light and more. The user can create a schedule to turn on the lights at certain hours. Smart lights allow the user to control the energy consumption of the smart home.

CONCLUSIONS

Designing and building of smart homes is related to the necessity of wireless connectivity and Z-wave technology is among the most popular ones for home automation. Bluetooth and Zigbee wireless communication protocols often lack coverage, and Wi-Fi places its limitations on a low-power ecosystem. The Z-wave standard meets the requirements for home automation and Z-wave devices are interoperable - can be easily accessed through the internet or a Z-wave gateway.

We introduced a home automation system based on Z-wave. The smart home built with this technology is useful for consumers as it will save energy, because there will be no lights or AC power left on when they are not at home. In the next project, we will explore the interaction between a Z-wave-based home automation system and control with an Android mobile device.

Acknowledgement: This paper is partially supported by the Project of the National Science Fund of Bulgaria, BNSF H27/36; National Scientific Program "Information and Communication Technologies for a Single Digital Market in Science, Education and Security (ICTinSES)", financed by the Ministry of Education and Science. We also gratefully acknowledge the support by the company

Chikalov EOOD with manager Aleksandar Chikalov.

REFERENCES

1. Ch. Reinisch, W. Kastner, W. Granzer, *5th IEEE International Conference on Industrial Informatics*, **2**, 93 (2007).
2. D. Resul, T. Gurkan, T. Ayse, *IJCNA*, **2(6)**, 242 (2015).
3. M. Basma, E. Mohammad, S. Abd El-kader, M. Fakhredinet, *IJAIEEM*, **2(3)**, 413 (2013).
4. F. AlFaris, A. Juaidi, F. Manzano-Agugliaro, *Energy and Buildings*, **153**, 262 (2017).
5. D. Fuller, B. Ramsey Rogue, *40th Local Computer Networks Conference Workshops (LCN Workshops)*, 734 (2016).
6. Z. Krasniqi, B. Vershevcic, *IC-ISS 2020: 9th International Conference on Information Systems and Security*, Kosovo, 1 (2020).
7. D. Kundu, M. Khallil, T. Das, A. Mamun, A. Musha. *IJSER*, **11(6)**, 697 (2020).
8. O. Taiwo, L. Gabralla, A. Ezugwu, *Computational Science and its Applications – ICCSA 2020*, O. Gervasi et al. (eds.), Springer Nature, Switzerland, 2020.
9. L. Oliveira, J. Rodrigues, S. Kozlov S, R. Rabêlo R, V. Albuquerque. *Future Internet*, **11**, 16 (2019).
10. Z-Wave Alliance-Home Management: <https://z-wavealliance.org/home-management/>.
11. <https://www.z-wave.com/>
12. M. Yassein, W. Mardini, A. Khalil, *Proceedings of the International Conference on Engineering MIS (ICEMIS)*, Agadir, Morocco, 1, (2016).
13. IEEE Computer Society. *IEEE Standards IEEE 802.15.4-Part 15.4—Wireless MAC and PHY Specifications for Low-Rate Wireless Personal Area Networks—LR-WPANs*, 2003 edn., The Institute of Electrical and Electronics Engineers Inc., Piscataway, NJ, USA, 2003.
14. IEEE 802.15.6-2012. *IEEE Standard for Local and Metropolitan Area Networks—Part 15.6: Wireless Body Area Networks; IEEE Standard for Information Technology*, IEEE, Piscataway, NJ, USA, **802**, 1 (2012).
15. <https://www.rfwireless-world.com/Tutorials/z-wave-tutorial.html>.
16. <https://www.vesternet.com/pages/how-z-wave-controllers-devices-work>.
17. F. Sapundzhi, M. Popstoilov, *Proc. 27th National Conference with International Participation "TELECOM 2019"*, Sofia, Bulgaria, 62 (2019).
18. AutoCAD: <https://www.autodesk.com/>.
19. Dialux: <https://www.dialux.com/>.
20. Cisco Packet Tracer <https://www.netacad.com/>.
21. F. Sapundzhi, *TEM Journal*, **9** (1), 144 (2020).
22. M. Negnevitsky, *Artificial Intelligence: A Guide to Intelligent Systems*, Addison-Wesley, 2011.
23. F. Sapundzhi, *International Journal of Online and Biomedical Engineering*, **15 (11)**, 139 (2019).

F. I. Sapundzhi: Home automation based on Z-wave technology

24. M. Traykov, I. Trenchev, *Russian Journal of Genetics*, 52(9), 985 (2016).
25. F. Sapundzhi, *International Journal of Online and Biomedical Engineering*, **15 (12)**, 88 (2019).
26. M. Lazarova, K. Kostadinova, *AIP Conference Proceedingsthis*, 2048, 020021 (2018).
27. I. Nedyalkov, G. Georgiev, *EUROCON 2021 - 19th IEEE International Conference on Smart Technologies, Proceedings*, 397 (2021).
28. A. Stoykova, M. Paskaleva, *Springer Proceedings in Business and Economics*, 359 (2021).
29. F. Sapundzhi, M. Popstoilov, *Bulgarian Chemical Communications*, **50**, Special Issue B, 115 (2018).